

LED DOWNLIGHT SOLEIL

DESCRIPTION

The LED Downlight Soleil recessed luminaire replaces CFL and PL-C downlight fixtures and generates at least 50% in energy savings. The integrated LED light source can last up to 50,000 hours, saving on maintenance and replacement costs of PL-C lamps. Thanks to the narrow rim, there is a perfect integration with e.g. system-, stucco- and plaster ceilings in corridors. This Downlight has a UGR <19 value, which according to the EN 12464: 2011 is ideally suited for offices, hotels, restaurants, retail, hospitals and housing. This fixture is measured according to the measuring methods, EMC, EMI and RoHS, having an efficiency of 92 lumens per watt. A deepened design and PC diffuser ensures a guaranteed comfortable light display. With this robust downlight, the payback period is guaranteed to be short.



APPLICATIONS



Office



Hotel



Restaurant



Retail



Housing

SPECIFICATIONS

EAN	Item description	Power (W)	Lumen	Efficacy (lm/W)	Input Current(mA)	CCT (K)	CRI	Equivalent	Lifespan L80 at 25°C
8719157009355	Noxion LED Downlight Soleil CRI>90 3000K 90D Wit UGR<19	28	2585lm	92	700	3000	80	118W	50000h

TECHNICAL SPECIFICATIONS

Technical specifications	
UGR	<19
Dimmable	No
Beam angle (°)	90°
IP	IP44
IK	IK05
Protection class	II
Integrated driver (Yes/No)	No
Glow wire test	650°C
Driver Built in	Yes

Mechanical Properties	
Housing material	AL+PS
Color (Housing)	RAL9016
Optic	Diffuser
Physical characteristics	
Diameter (mm)	215mm
Cutout size Ø (mm)	185-195mm
Installation depth (mm)	65mm

Electrical Supply

Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	DC
Power factor	>0.9

Application

Operating temperature	-20°C~50°C
-----------------------	------------

Certifications

Driver certifications	CE / RoHS
Fixture certifications	CE / RoHS
Test reports	EMC / EMI / RoHS


PACKAGING INFORMATION

Item		Box 1 Item		Masterbox	
EAN	Item description	Dimensions (mm) (HxWxL)	Weight (kg)	Units per masterbox	Dimensions (mm) (HxWxL) Weight (kg)
8719157009355	Noxion LED Downlight Soleil CRI>90 3000K 90D Wit UGR<19	L235*W235*H100	1.02KG	36pcs	L49*W49*H32.5 13.2KG


SPECIFICATIONS DRIVER

Voltage	Power(W)	Power Factor	Flickering	Size(mm)	Guarantee
220-240V	30W	>0.9	Yes	140mm*45mm*27.5mm	5 years

DIMENSIONAL DRAWINGS

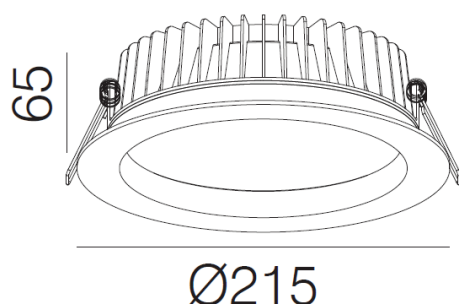

PHOTOMETRIC SPECIFICATIONS

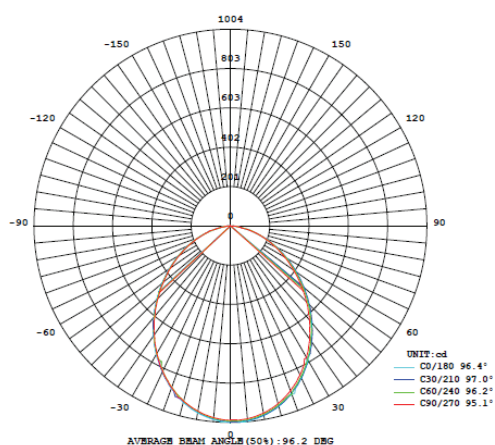

NOXION®
 Best in class lighting

This luminaire contains built-in LED lamps

A++

A+

A

B

C

D

E

L

E

D

The lamps cannot be changed in the luminaire

874/2012

NOXION®

© 2020 Noxion B.V. - All rights reserved. Noxion retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors.