



LED Panel Delta Pro UGR<19 V2.0

DESCRIPTION

LED Panel Delta Pro UGR<19 V2.0 is an ultra-thin luminaire suitable for replacing conventional T5 fixtures, generating up to 50% in energy savings. This panel has a UGR <19 value, which according to the EN 12464: 2011 is ideally suited for offices, meeting rooms, libraries, health centers, schools etc. With its very slim design, this fixture perfectly integrates with 60x60, 62.5x62.5 and 30x120cm grid ceiling layouts. The ultra-thin design allows the fixture to be installed in areas with a limited installation height. If there is no suspended ceiling, a suspension kit or surface-mounting kit can be used. In addition, the micro prismatic lens ensures uniformity and a diffused light effect. The integrated LED light source can last 70,000 hours, guaranteeing savings on maintenance and replacement costs. This fixture is also flicker-free, measured according to the measuring methods LM-79 and LM-80, and has an efficiency of 109 lumens per watt. Because of the excellent value for money and efficiency, a short payback period is guaranteed.



APPLICATIONS



Office



School



Hospital



Retail



Library



Congress

OPTIONAL

- Suspension Kit
- Surface Mounted Kit
- Mounting Clips
- Security Cable
- Dali Driver



SPECIFICATION

EAN	Item Description	Power (W)	Lumen (LM)	Efficacy (lm/W)	Lamp Current (mA)	CCT (K)	CRI	Equivalent	Lifetime (hrs)
8719157009577	Noxion LED Panel Delta Pro UGR<19 V2.0 30W 3960lm 3000K 600x600	30	3960	132	150	3000	≥80	3x18W	50,000
8719157009584	Noxion LED Panel Delta Pro UGR<19 V2.0 30W 4110lm 4000K 600x600	30	4110	137	150	4000	≥80	3x18W	50,000
8719157009591	Noxion LED Panel Delta Pro UGR<19 V2.0 30W 4110lm 6500K 600x600	30	4110	137	150	6500	≥80	3x18W	50,000
8719157009607	Noxion LED Panel Delta Pro UGR<19 V2.0 30W 3960lm 3000K 625x625	30	3960	132	150	3000	≥80	3x18W	50,000
8719157009614	Noxion LED Panel Delta Pro UGR<19 V2.0 30W 4110lm 4000K 625x625	30	4110	137	150	4000	≥80	3x18W	50,000
8719157009621	Noxion LED Panel Delta Pro UGR<19 V2.0 30W 4110lm 6500K 625x625	30	4110	137	150	6500	≥80	3x18W	50,000
8719157009638	Noxion LED Panel Delta Pro UGR<19 V2.0 30W 3960lm 3000K 300x1200	30	3960	132	150	3000	≥80	2x36W	50,000
8719157009645	Noxion LED Panel Delta Pro UGR<19 V2.0 30W 4110lm 4000K 300x1200	30	4110	137	150	4000	≥80	2x36W	50,000
8719157009652	Noxion LED Panel Delta Pro UGR<19 V2.0 30W 4110lm 6500K 300x1200	30	4110	137	150	6500	≥80	2x36W	50,000

ACCESSORIES

EAN	Item Description
8719157009515	Noxion LED Panel Econox Removable Surface Mounted Kit 600x600
8719157009522	Noxion LED Panel Econox Removable Surface Mounted Kit 625x625
8719157009539	Noxion LED Panel Econox Removable Surface Mounted Kit 300x1200
8719157009546	Noxion LED Panel Econox Mounting Clips
8719157009553	Noxion LED Panel Econox Suspension Kit
8719157009560	Noxion LED Panel Econox Security Cable 1.5M
8719157010573	Noxion Xitanium DALI 36W WH 0.3-1A 54V TD/ls 230V



TECHNICAL SPECIFICATIONS

Technical Specifications	
UGR	<19
Dimmable	No
Beam Angle	120°
IP	IP20
IK	IK02
Protection Class	II
Integrated Driver (Y/N)	No
Driver Built-in (Y/N)	No


Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC
Power Factor	0.9

Mechanical Properties	
Housing Material	Cold-Rolled Sheet+LV+PS
Color (Housing)	9003
Optic	Lens
Application	
Operating temperature	-10~+40°C
Certifications	
Fixture certifications	CE / ENEC / KEMAKEUR / GS MARK
Test Reports	LM79+SDCM

PACKAGING INFORMATION

Item Description	Box 1 Item		Masterbox		
	Dimensions (mm) (HxWxD)	Weight (kg)	Units per Masterbox	Dimensions (mm) (HxWxD)	Weight (kg)
8719157009577	620*46.5*682	2.33	6	640*302*702	15.17
8719157009584	620*46.5*682	2.33	6	640*302*702	15.17
8719157009591	620*46.5*682	2.33	6	640*302*702	15.17
8719157009607	707*46.5*645	2.47	6	665*302*727	16.03
8719157009614	707*46.5*645	2.47	6	665*302*727	16.03
8719157009621	707*46.5*645	2.47	6	665*302*727	16.03
8719157009638	320*46.5*1282	2.74	6	340*302*1302	17.8
8719157009645	320*46.5*1282	2.74	6	340*302*1302	17.8
8719157009652	320*46.5*1282	2.74	6	340*302*1302	17.8

DIMENSIONAL DRAWINGS

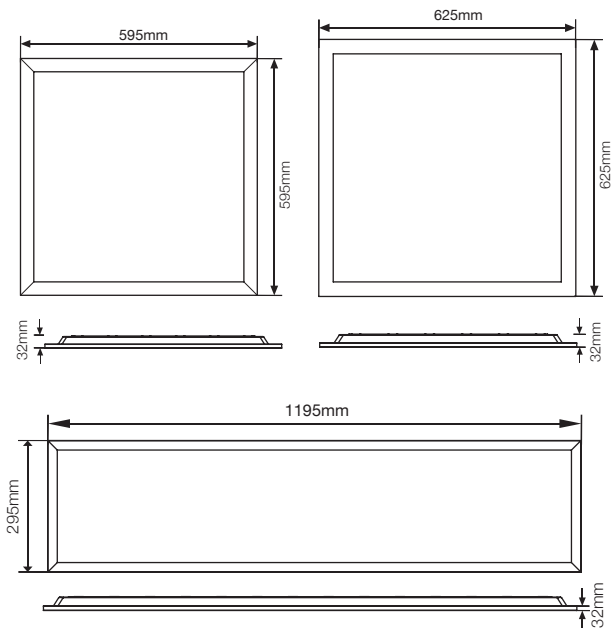


DETAILS




PHOTOMETRIC SPECIFICATIONS


8719157009577

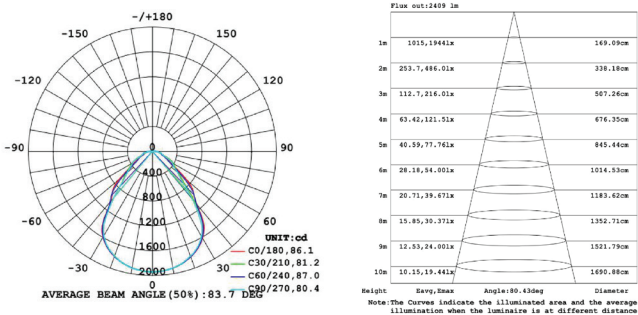


8719157009584

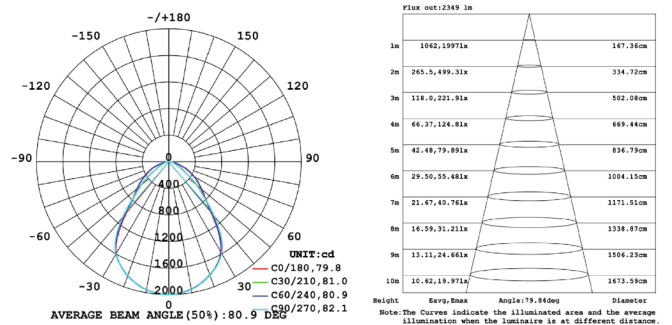


8719157009591

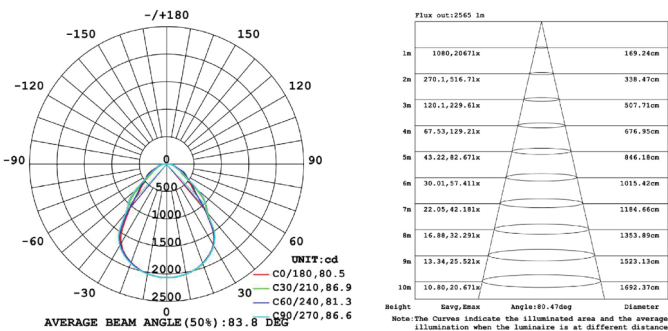


8719157009638

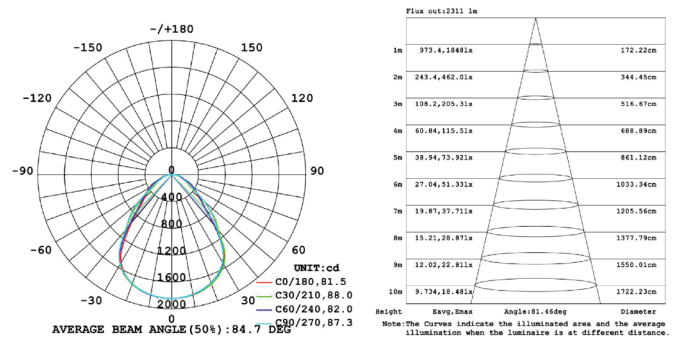

8719157009645

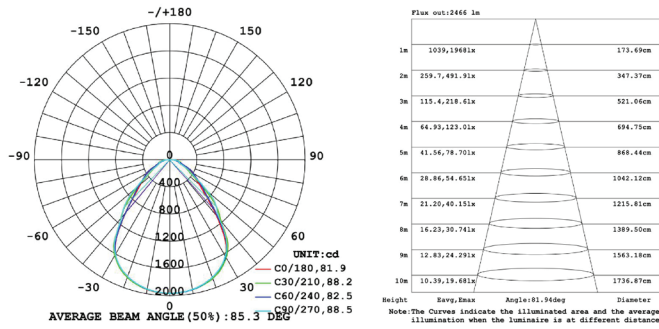

8719157009652

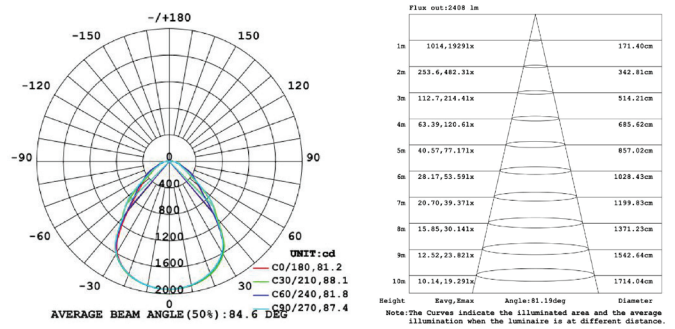

SPECIFICATION DRIVER

Titanium DALI 36W WH 0.3-1A 54V TD/ls 230V	
Voltage	220-240
Power (W)	36W
Power Factor	0.9
Flickering	No
Guarantee	7 Years

CIRCUIT BREAKER

LED Panel Delta Pro UGR<19 V2.0	
B16	60PCS
C16	70PCS

NOXION
Best in class lighting

This luminaire contains built-in LED lamps

A++
A+
A
B
C
D
E

} LED

The lamps cannot be changed in the luminaire

874/2012

NOXION

© 2020 Noxion B.V. - All rights reserved. Noxion retains the right to modify product specifications without any prior notice or obligation and does not assume any liability for any consequences of using this document. Subject to errors and printing errors.